

T-FAIRY SERIES



Transparent LED Display



Dancing with the glass, Fit freely.


Curved / Frameless / Customized

TF2.8, TF3.9, TF7.8, TF10.4

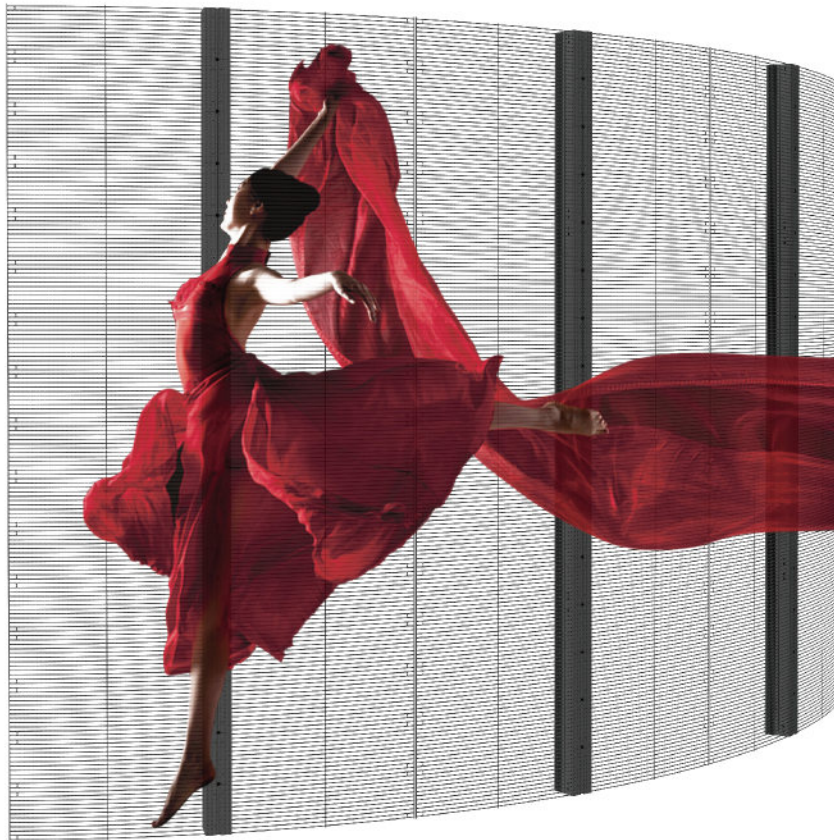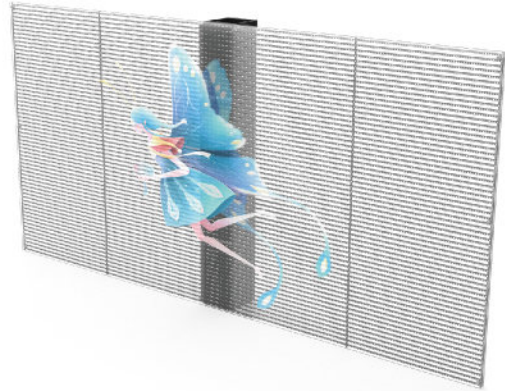

PRODUCT DETAILS

Transparent LED Display

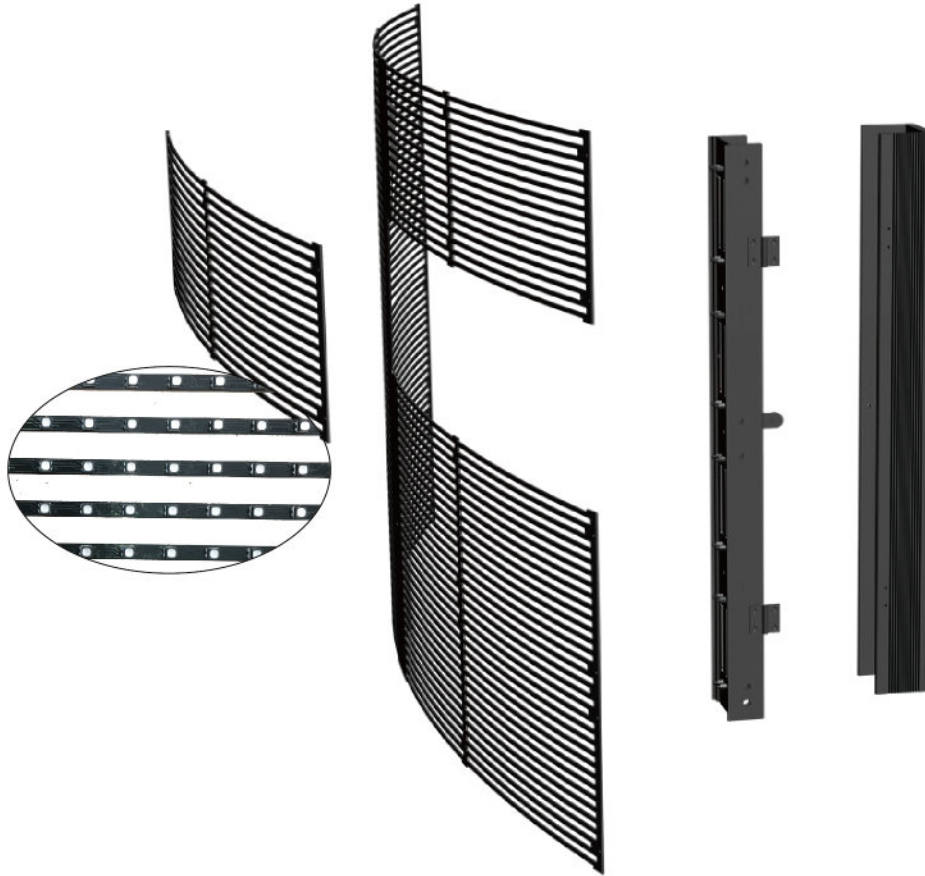


FEATURES

- 1.FRAMELESS**
Higher transparent rate and lighter weight.
- 2.CURVED**
Flexible transparent LED display, could be curved.
- 3.SUPER LIGHT WEIGHT**
7kg/m², one cabinet is only 3.5kg. Save shipping cost.
- 4.HIGH TRANSPARENCY**
The transparent rate is from 45% to 85%.
- 5.CUSTOMIZED SIZE**
Modular design, the cabinet size could be customized according to on site.
- 6.EASY INSTALLATION MAINTENANCE**
Quick installation and maintenance, reduce labor cost.
- 7.OUTSTANDING APPEARANCE**
No cables are visible on backside of screen, no need complicated steel structure. Simple and clean.



T-FAIRY SERIES

Transparent LED Display

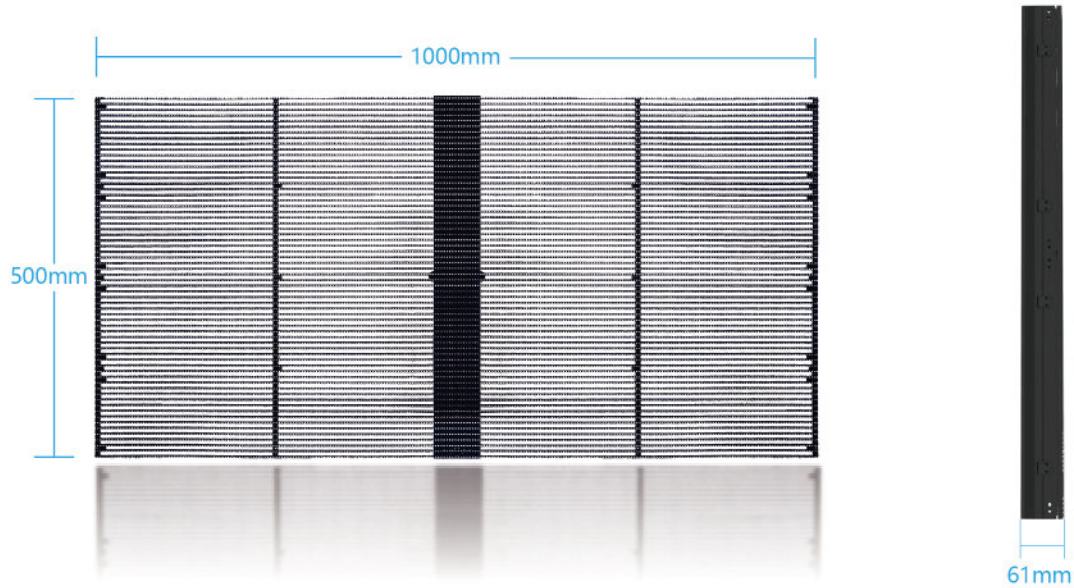

Technical Specifications

Product Model	T-FAIRY2.8	T-FAIRY3.9	T-FAIRY7.8	T-FAIRY10.4
Pixel Pitch	2.8-5.6 mm	3.9-7.8 mm	7.8-7.8 mm	10.4-10.4 mm
LED Type	SMD1921	SMD2121/1921	SMD1921	SMD1921
Cabinet Dimension	1000x500 mm	1000x500 mm	1000x500 mm	1000x500 mm
Module Size	500x125 mm	500x125 mm	500x125 mm	500x125 mm
Cabinet Weight	3.5 kg	3.5 kg	3.5 kg	3.5 kg
Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum
Driving Type	1/11	1/16;1/8	1/6	1/2
Brightness	5500 nits	1000nits;5500 nits	5500 nits	5500 nits
Max/Avg Power	800/240 W/m ²	800/240 W/m ²	800/240 W/m ²	800/240 W/m ²
Transparency	45%	65 %	65%	75%
IP Rating	IP22	IP22	IP22	IP22
Refresh Rate	>1920 Hz	>1920 Hz	>1920 Hz	>1920 Hz
Installation Type	Mounting/Hanging	Mounting/Hanging	Mounting/Hanging	Mounting/Hanging
Gray Scale	16 bit	16 bit	16 bit	16 bit
Viewing Angle	H:160°; V:160°	H:160°; V:160°	H:160°; V:160°	H:160°; V:160°
Operational Temp	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C	-20°C~+50°C
Operational Humidity	10%~90% RH	10%~90% RH	10%~90% RH	10%~90% RH

PRODUCT APPLICATION

