T-SHINE SERIES

Transparent LED Display

VISUAL WORLD

Shining with the glass, Fit freely.
Stable / Fixed&Rental / Customized

TS2.8，TS3.9，TS7.8，TS10.4

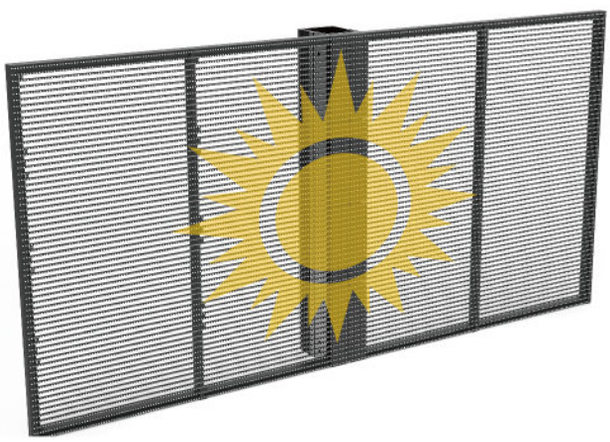

VISUAL WORLD CO., LTD.
Tel: +86 0755-23052717
Email: Sales@ledvworld.com
Website: www.ledvworld.com

PRODUCT DETAILS Transparent LED Display

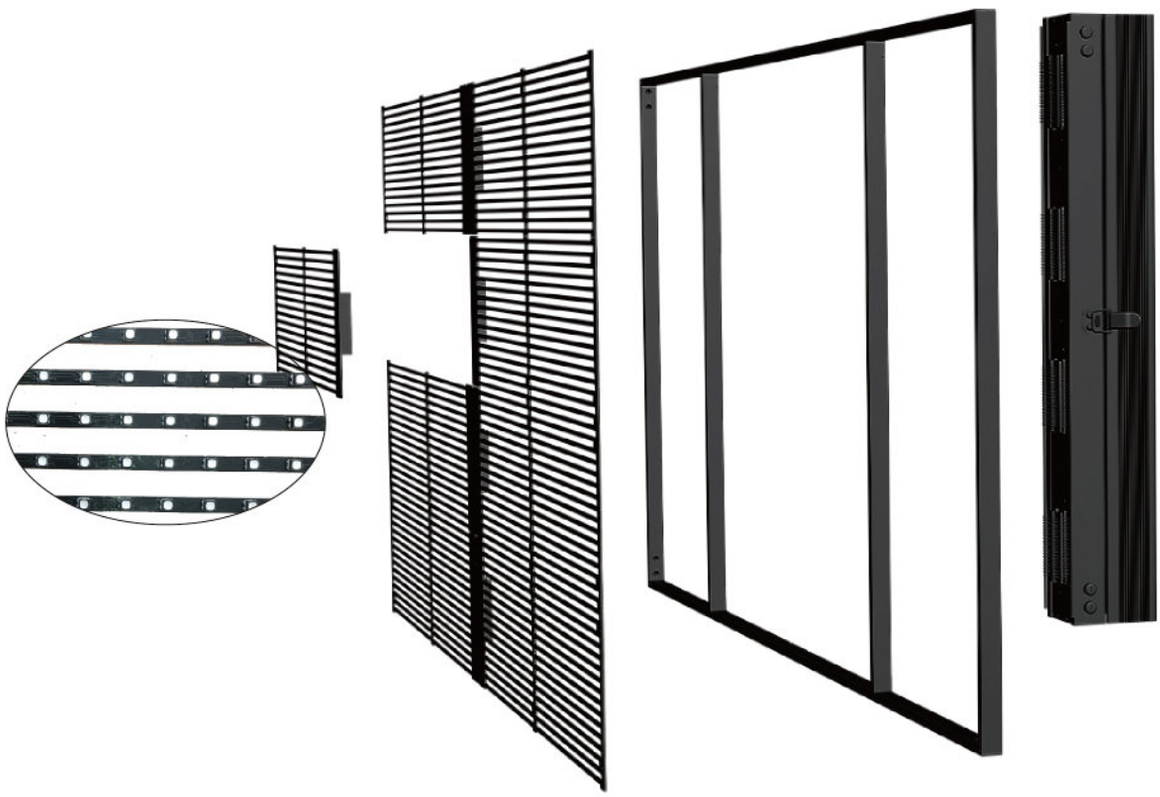

FEATURES

1.STABLE

With frame design, more stable, could do hanging and floor standing installation.

2.DUAL USE

Could be used for fixed or rental.

3. ULTRA SLIM & LIGHT WEIGHT

9kg/m2, one cabinet is only 4.5kg (0.5 m2). Save shipping cost.

4.HIGH TRANSPARENCY

The transparent rate is from 45% to 85%.

5.CUSTOMIZED SIZE

Modular design, the cabinet size could be customized according to on site.

6.EASY INSTALLATION MAINTENANCE

Quick installation and maintenance, reduce labor cost.

7.OUTSTANDING APPEARANCE

No cables are visible on backside of screen, no need complicated steel structure. Simple and clean.

T-SHINE SERIES

Transparent LED Display

VISUAL WORLD

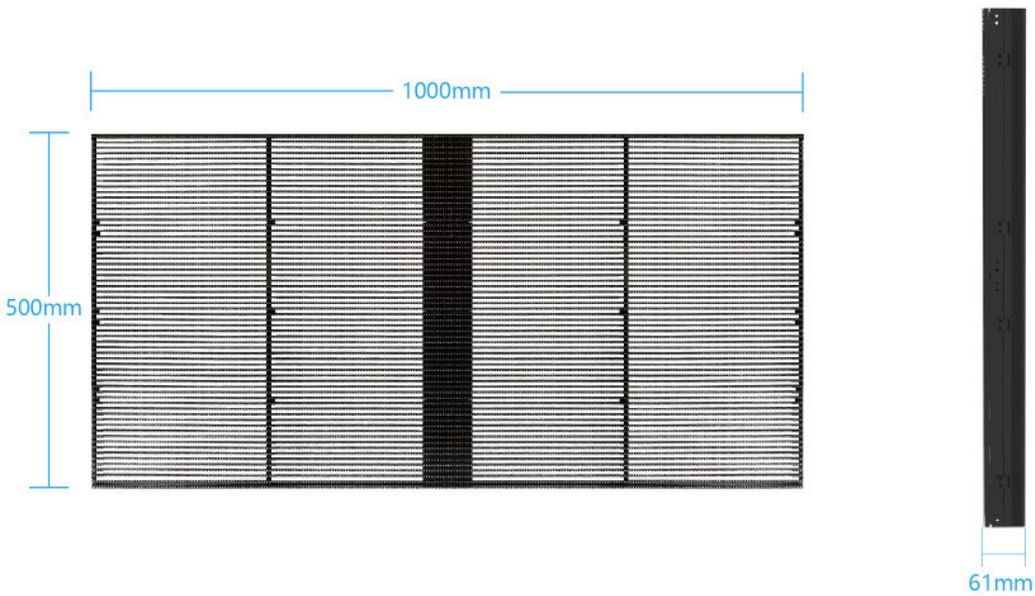

Technical Specifications

Product Model	T-SHINE2.8	T-SHINE3.9	T-SHINE7.8	T-SHINE10.4
Pixel Pitch	2.8-5.6 mm	3.9-7.8 mm	7.8-7.8 mm	10.4-10.4 mm
LED Type	SMD1921	SMD2121/1921	SMD1921	SMD1921
Cabinet Dimension	1000x500 mm	1000x500 mm	1000x500 mm	1000x500 mm
Module Size	500x125 mm	500x125 mm	500x125 mm	500x125 mm
Cabinet Weight	4.5 kg	4.5 kg	4.5 kg	4.5 kg
Cabinet Material	Aluminum	Aluminum	Aluminum	Aluminum
Driving Type	1/11	1/16;1/8	1/6	1/2
Brightness	5500 nits	1000nits;5500 nits	5500 nits	5500 nits
Max/Avg Power	800/240 W/m2	800/240 W/m2	800/240 W/m2	800/240 W/m2
Transparency	45%	65 %	65%	75%
IP Rating	IP22	IP22	IP22	IP22
Refresh Rate	>1920 Hz	>1920 Hz	>1920 Hz	>1920 Hz
Installation Type	Mounting/Hanging	Mounting/Hanging	Mounting/Hanging	Mounting/Hanging
Gray Scale	16 bit	16 bit	16 bit	16 bit
Viewing Angle	H:160°; V:160°	H:160°; V:160°	H:160°; V:160°	H:160°; V:160°
Operational Temp	-20℃~+50℃	-20℃~+50℃	-20℃~+50℃	-20℃~+50℃
Operational Humidity	10%~90% RH	10%~90% RH	10%~90% RH	10%~90% RH
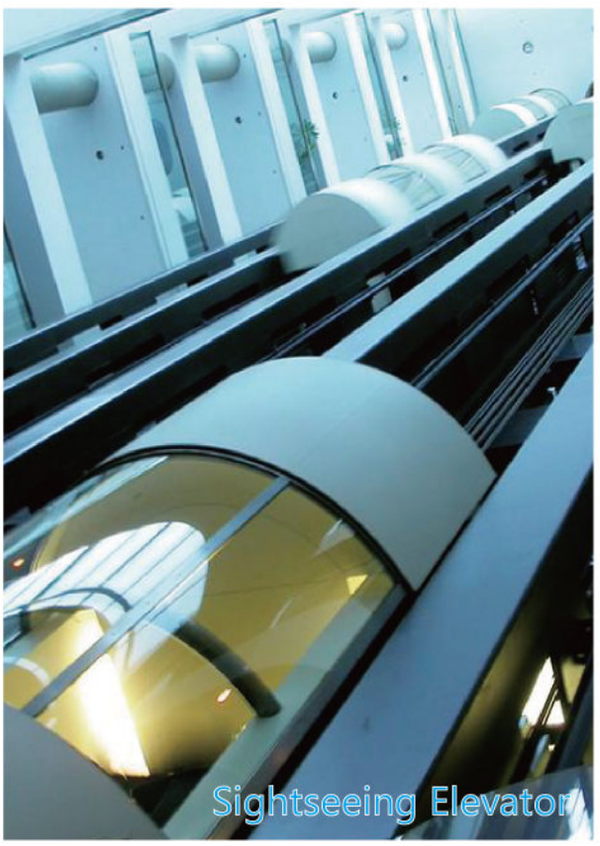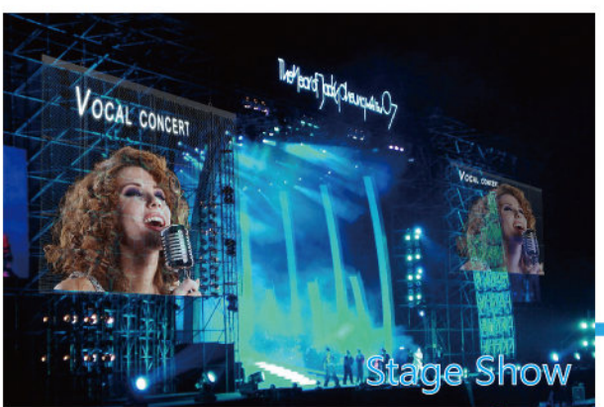
PRODUCT APPLICATION