



VISUAL WORLD



V-Poster Series

P0.7mm

P0.9mm

P1.25mm

P1.56mm



WATERPROOF



LOW ENERGY



HEAT SINK



LIGHT WEIGHT



REDUCE GLARE



VISUAL EXPERIENCE



EASY INSTALL



MAINTENANCE



MULTI ASSEMBLY

01

Convenient and Thin

Cabinet 1X5
Cabinet 1X6



- Easy to move with 4 wheels
- The screen body can be foldable
- Lightweight & Ultrathin (29.5mm thickness)



Bezel-less Design

Immersive viewing with a virtually bezel-less design. Easy splicing and hassle-free installation with a magnetic frame.



REDUCE GLARE




VISUAL EXPERIENCE



Seamless Design

Individual posters can be seamlessly spliced together to create larger displays without removing any exterior trims.






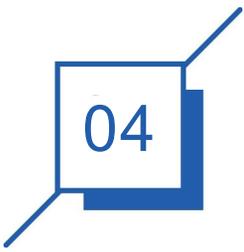

Highest Protection



COB technology seals the entire PCBA with epoxy resin, providing robust protection against physical damage.

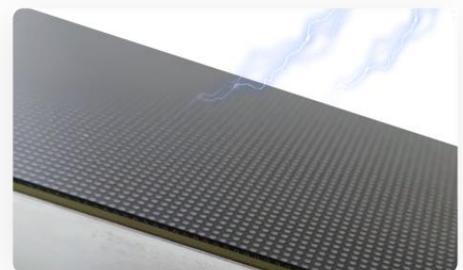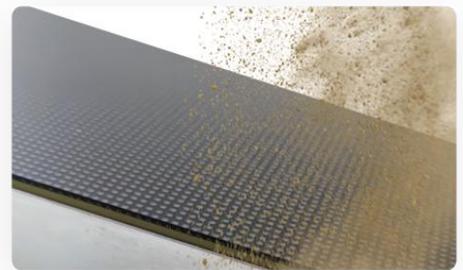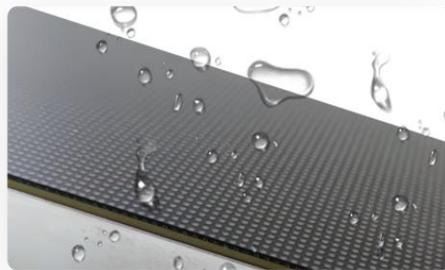


Cable Free & Hot Plugging

100% hard connection. Hot plugging for seamless module replacement and installation without downtime.

06

Wireless Control By Phone

Effortlessly control your Poster using an app. Change content, adjust brightness, and more from your phone.

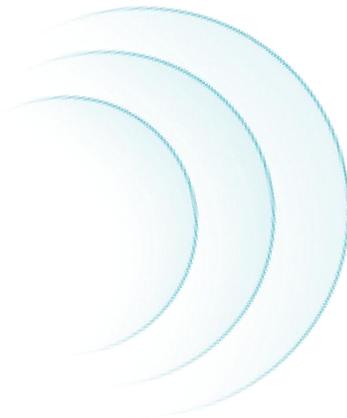

07

Worldwide Cloud Network

Manage multiple posters with a cloud platform. Program and control from anywhere.



08

Easy Front Maintenance

The Poster enables easy front-side installation, management, and maintenance of LED modules with a magnetic tool.



Product Parameter

Poster Series	Cabinet 1x5				Cabinet 1x6			
Pixel Pitch:	0.7mm	0.9mm	1.25mm	1.56mm	0.7mm	0.9mm	1.25mm	1.56mm
LED Type:	Flip-COB (common cathode)				Flip-COB(common cathode)			
Poster Size	610x1805.9 mm				610x2143.4 mm			
Screen Size:	600x1687.5 mm				600x2025 mm			
Cabinet Dimension:	600x337.5mm							
Module Size:	150x168.75 mm							
Poster Weight:	36.5kg				41kg			
Cabinet Material:	Die-casting Aluminum							
Screen Resolution:	769*21 60Pixel	640*18 00Pixel	480*13 50Pixel	384*10 80Pixel	769*25 92Pixel	640*21 60Pixel	480*16 20Pixel	384*12 96Pixel
Max/Avg Power:	248/87W/pc				300/105W/pc			
Driving Type:	1/36	1/36 1/54	1/27 1/60	1/48	1/36	1/36 1/54	1/27 1/60	1/48
Maintenance:	Front Service							
IP Rating:	Front: IP54; Rear: IP30							
Refresh Rate:	>3840 Hz							
Installation Type:	Standing & Foldable							
Gray Scale:	14 bit							
Viewing Angle:	H:140° ; V:140°							
Operational Temp:	-20°C~+50°C							
Operational Humidity:	10%~90% RH							

Application

- Shopping Mall
- Restaurant
- Gallery / Exhibition
- Gymnasium / Sports Hall

